

UV-Gard 200

UV-Gard is an optically clear, UV rejecting film which can be used in applications where maximum light transmission and fade control is desired, such as in museums or retail storefronts. UV Gard can also be used in homes or buildings where excessive UV exposure is a health concern.

Product Benefits

- Optically Clear
- Reduces Heat Gain
- Helps Shatter Resistance
- Rejects Over 99% of UV Rays
- Slows Fading of Valuables and Interior Environments


Why Madico?

Madico window films are an elegant, practical solution for comfort, protection and natural appearance. With over 100 years of innovation, Madico is a leading provider of advanced products engineered to meet your needs. When selecting the right window film for your home or building, you can trust in our professionally installed quality products.

www.madico.com

**MADICO**
Window Films





UV-Gard 200

Technical Specifications

Total Solar Energy:

Transmitted %	79.0
Reflected %	8.0
Absorbed %	13.0

Visible Light:

Transmitted %	82.0
Reflected Exterior %	8.0
Reflected Interior %	8.0
Glare Reduction %	9.0

Solar Heat Gain Coefficient	0.83
Shading Coefficient	0.95
Luminous Efficacy	0.86
Total Solar Energy Rejection %	17.0
Infrared Rejection %*	19.0

U Factor	1.05
Emissivity	0.88
Ultraviolet Rejection %	Exceeds 99.0


* Near IR range (780-2500nm)

Technical specification definitions can be found at www.madico.com

Read in accordance with National Fenestration Rating Council (NFRC) standards on 3mm clear glass.



Film Properties:

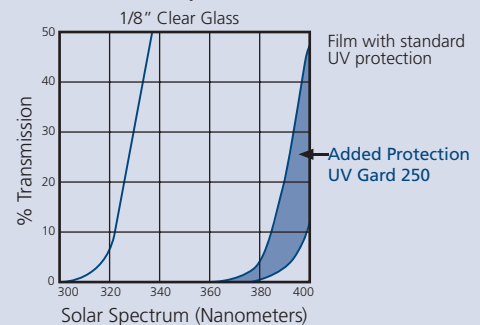

Specification Use Statement

Reported values are typical properties and should not be used as a specification. Since the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for intended use. If you need verification regarding specific use or additional information, please contact Madico Window Films or your local Madico Authorized Dealer.